


## TECHNICAL DATA SHEET

### ENG-SI-ADI SIGNATURE OAK RANGE: ADIRONDACK

#### PRODUCT SPECIFICATIONS

<b>PRODUCT RANGE</b>	SIGNATURE OAK RANGE
<b>COLOUR</b>	ADIRONDACK
<b>PRODUCT CODE</b>	ENG-SI-ADI
<b>CONSTRUCTION</b>	MULTI-LAYERED ENGINEERED
<b>BACKING</b>	EUCALYPTUS
<b>SPECIES</b>	EUROPEAN OAK
<b>PATTERN</b>	1 STRIP
<b>BOX SIZE</b>	2.42m <sup>2</sup>
<b>EDGE</b>	BEVEL
<b>PROFILE</b>	TONGUE AND GROOVE
<b>FINISH</b>	10% MATTE - 9 COATS TREFFERT LACQUER
<b>TOP LAYER</b>	4mm EUROPEAN OAK LAMELLA
<b>THICKNESS</b>	15mm
<b>WIDTH</b>	230mm
<b>LENGTH</b>	2100mm (Product contains split lengths, with up to 25% shorter boards. These may be half or 1/3 lengths)

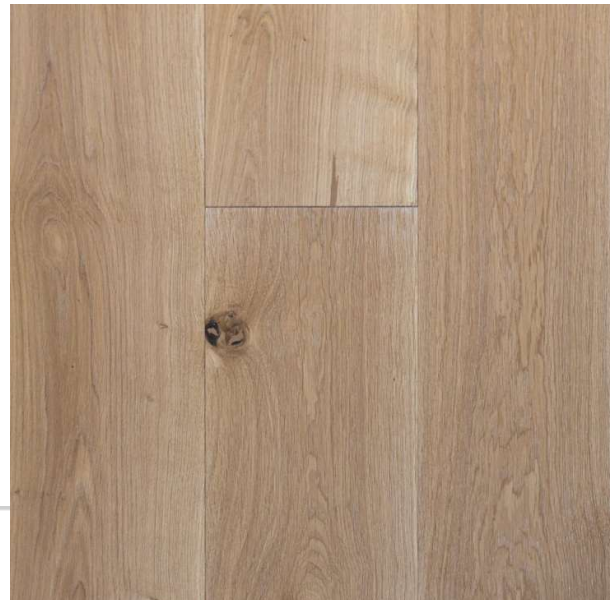

The photograph used in this sheet is intended as an illustration. It does not provide any indication of grading. Colours will vary between batches in stock.

#### INSTALLATION METHODS

<b>DIRECT STICK</b>	YES
<b>FLOATING ON UNDERLAY</b>	YES
<b>OVER UNDERFLOOR HEATING</b>	YES WITH RESTRICTIONS

#### WARRANTY

<b>RESIDENTIAL</b>	LIFETIME STRUCTURAL
<b>COMMERCIAL</b>	10 YEARS STRUCTURAL

#### AUSTRALIAN STANDARDS

<b>ACOUSTIC RATING</b>	DEPENDENT ON UNDERLAY
<b>SLIP RATING AS 4586-2013</b>	P3
<b>FORMELDELHYDE RATING</b>	E1
<b>CRITICAL HEAT FLUX (CHF) MEAN AS/ISO 9239.1-2003</b>	4.6 kW/m <sup>2</sup>
<b>JANKA HARDNESS RATING</b>	1120

