


TECHNICAL DATA SHEET

ENG-HE-MOO SIGNATURE OAK RANGE: MOONDANCE

PRODUCT SPECIFICATIONS

| | |
|---------------|-----------------------------------------|
| PRODUCT RANGE | SIGNATURE OAK RANGE |
| COLOUR | MOONDANCE |
| PRODUCT CODE | ENG-HE-MOO |
| CONSTRUCTION | MULTI-LAYERED ENGINEERED |
| BACKING | EUCALYPTUS |
| SPECIES | EUROPEAN OAK |
| PATTERN | 1 STRIP |
| BOX SIZE | 0.448m ² |
| EDGE | BEVEL |
| PROFILE | TONGUE AND GROOVE |
| FINISH | 25% SATIN – 9 COATS TREFFERT LACQUER |
| TOP LAYER | 4mm EUROPEAN OAK LAMELLA |
| THICKNESS | 15mm |
| WIDTH | 80mm |
| LENGTH | 560mm |

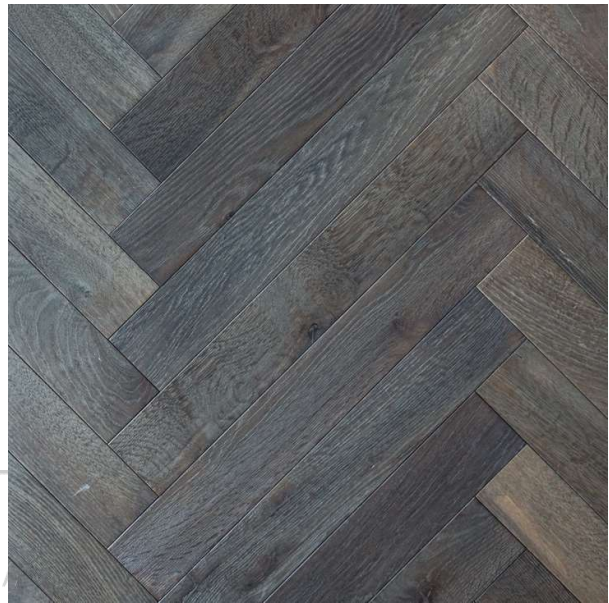

The photograph used in this sheet is intended as an illustration. It does not provide any indication of grading. Colours will vary between batches in stock.

INSTALLATION METHODS

| | |
|-------------------------|-----|
| DIRECT STICK | YES |
| FLOATING ON UNDERLAY | NO |
| OVER UNDERFLOOR HEATING | YES |

WARRANTY

| | |
|-------------|---------------------|
| RESIDENTIAL | LIFETIME STRUCTURAL |
| COMMERCIAL | 10 YEARS STRUCTURAL |

AUSTRALIAN STANDARDS

| | |
|--------------------------------------------------|-----------------------|
| ACOUSTIC RATING | DEPENDENT ON UNDERLAY |
| SLIP RATING AS 4586-2013 | P3 |
| FORMELDELHYDE RATING | E1 |
| CRITICAL HEAT FLUX (CHF) MEAN AS/ISO 9239.1-2003 | 4.6 kW/m ² |
| JANKA HARDNESS RATING | 1120 |

