


## TECHNICAL DATA SHEET

ENG-AU-SPO-180MB

### SIGNATURE AUSTRALIAN RANGE: SPOTTED GUM MATTE BRUSHED

#### PRODUCT SPECIFICATIONS

<b>PRODUCT RANGE</b>	SIGNATURE AUSTRALIAN RANGE
<b>COLOUR</b>	SPOTTED GUM
<b>PRODUCT CODE</b>	ENG-AU-SPO-180MB
<b>CONSTRUCTION</b>	MULTI-LAYERED ENGINEERED
<b>BACKING</b>	EUCALYPTUS PLYWOOD
<b>GRADE</b>	STANDARD AND BETTER
<b>PATTERN</b>	1 STRIP
<b>BOX SIZE</b>	VARIABLES WITH BATCH
<b>EDGE</b>	BEVEL
<b>PROFILE</b>	TONGUE AND GROOVE
<b>FINISH</b>	MATTE BRUSHED
<b>TOP LAYER</b>	3mm SPOTTED GUM LAMELLA
<b>THICKNESS</b>	14mm
<b>WIDTH</b>	180mm
<b>LENGTH</b>	1900mm (Product contains split lengths, with up to 25% shorter boards. These may be half or 1/3 lengths)

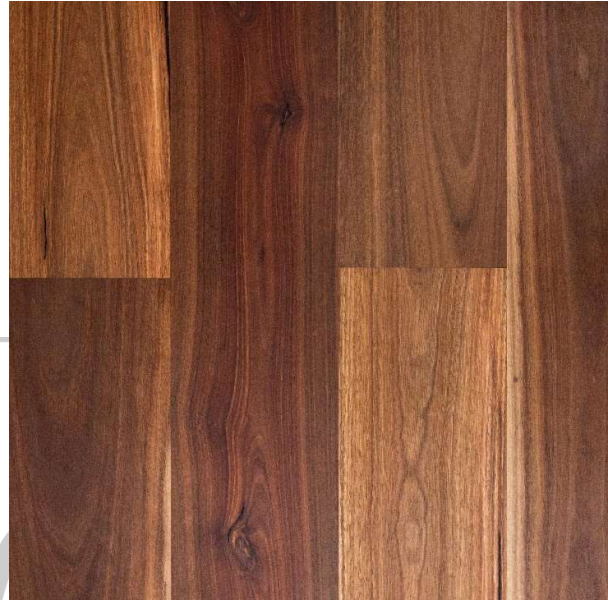

The photograph used in this sheet is intended as an illustration. It does not provide any indication of grading. Colours will vary between batches in stock.

#### INSTALLATION METHODS

<b>DIRECT STICK</b>	YES
<b>FLOATING ON UNDERLAY</b>	YES
<b>OVER UNDERFLOOR HEATING</b>	YES WITH LIMITATIONS

#### WARRANTY

<b>RESIDENTIAL</b>	LIFETIME STRUCTURAL
<b>COMMERCIAL</b>	10 YEARS STRUCTURAL

#### AUSTRALIAN STANDARDS

<b>ACOUSTIC RATING</b>	DEPENDENT ON UNDERLAY
<b>SLIP RATING AS 4586-2013</b>	P4
<b>FORMELDELHYDE RATING</b>	E1
<b>CRITICAL HEAT FLUX (CHF) MEAN AS/ISO 9239.1-2003</b>	3.2 kW/m <sup>2</sup>
<b>JANKA HARDNESS RATING</b>	11kN

