


## TECHNICAL DATA SHEET

### ENG-SI-COG SIGNATURE OAK RANGE: COGNAC

#### PRODUCT SPECIFICATIONS

|                      |  |
|----------------------|--|
| <b>PRODUCT RANGE</b> | SIGNATURE OAK RANGE  |
| <b>COLOUR</b>        | COGNAC   |
| <b>PRODUCT CODE</b>  | ENG-SI-COG   |
| <b>CONSTRUCTION</b>  | MULTI-LAYERED ENGINEERED   |
| <b>BACKING</b>       | EUCALYPTUS   |
| <b>SPECIES</b>       | EUROPEAN OAK   |
| <b>PATTERN</b>       | 1 STRIP  |
| <b>BOX SIZE</b>      | 1.805 m <sup>2</sup>   |
| <b>EDGE</b>          | BEVEL  |
| <b>PROFILE</b>       | TONGUE AND GROOVE  |
| <b>FINISH</b>        | 25% SATIN – 9 COATS TREFFERT<br>LACQUER  |
| <b>TOP LAYER</b>     | 4mm EUROPEAN OAK LAMELLA   |
| <b>THICKNESS</b>     | 15mm   |
| <b>WIDTH</b>         | 190mm  |
| <b>LENGTH</b>        | 1900mm (Product contains split<br>lengths, with up to 25% shorter boards.<br>These may be half or 1/3 lengths) |

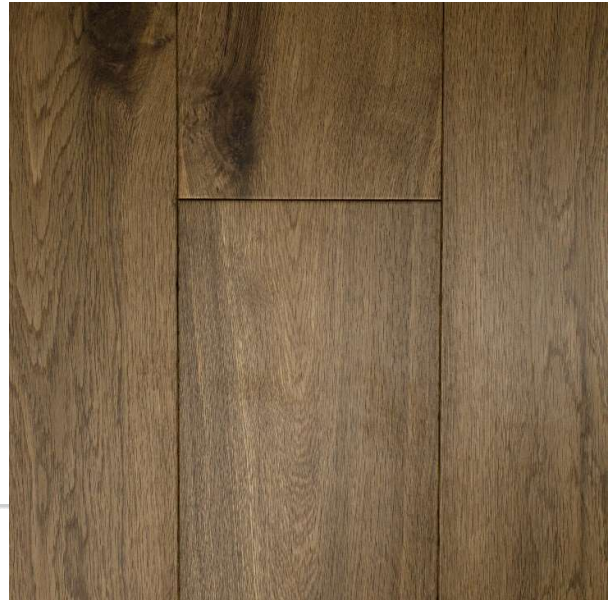

The photograph used in this sheet is intended as an illustration. It does not provide any indication of grading. Colours will vary between batches in stock.

#### INSTALLATION METHODS

|                                |     |
|--------------------------------|-----|
| <b>DIRECT STICK</b>            | YES |
| <b>FLOATING ON UNDERLAY</b>    | YES |
| <b>OVER UNDERFLOOR HEATING</b> | YES |

#### WARRANTY

|                    |                     |
|--------------------|---------------------|
| <b>RESIDENTIAL</b> | LIFETIME STRUCTURAL |
| <b>COMMERCIAL</b>  | 10 YEARS STRUCTURAL |

#### AUSTRALIAN STANDARDS

|   |                       |
|---|-----------------------|
| <b>ACOUSTIC RATING</b>                                  | DEPENDENT ON UNDERLAY |
| <b>SLIP RATING AS 4586-2013</b>                         | P2                    |
| <b>FORMELDELHYDE RATING</b>                             | E1                    |
| <b>CRITICAL HEAT FLUX (CHF) MEAN AS/ISO 9239.1-2003</b> | 4.6 kW/m <sup>2</sup> |
| <b>JANKA HARDNESS RATING</b>                            | 1120                  |

