


TECHNICAL DATA SHEET

ENG-SI-OAT SIGNATURE OAK RANGE: OATMEAL STOUT

PRODUCT SPECIFICATIONS

PRODUCT RANGE	SIGNATURE OAK RANGE
COLOUR	OATMEAL STOUT
PRODUCT CODE	ENG-SI-OAT
CONSTRUCTION	MULTI-LAYERED ENGINEERED
BACKING	EUCALYPTUS
SPECIES	EUROPEAN OAK
PATTERN	1 STRIP
BOX SIZE	2.42m ²
EDGE	BEVEL
PROFILE	TONGUE AND GROOVE
FINISH	25% SATIN – 9 COATS TREFFERT LACQUER
TOP LAYER	4mm EUROPEAN OAK LAMELLA
THICKNESS	15mm
WIDTH	220mm
LENGTH	2100mm (Product contains split lengths, with up to 25% shorter boards. These may be half or 1/3 lengths)

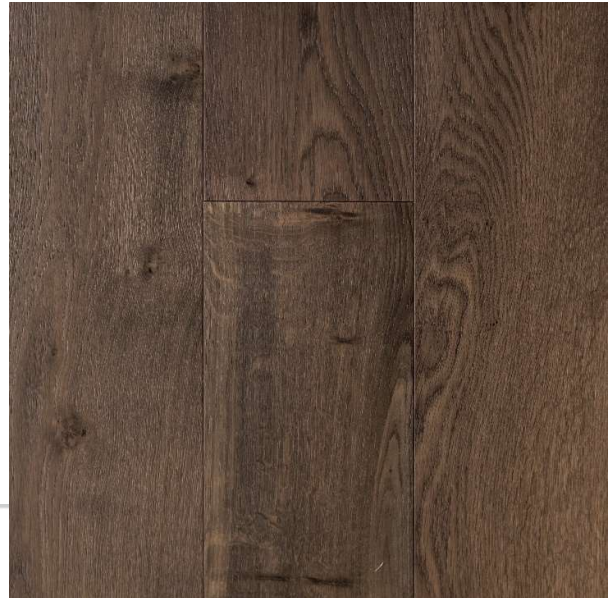

The photograph used in this sheet is intended as an illustration. It does not provide any indication of grading. Colours will vary between batches in stock.

INSTALLATION METHODS

DIRECT STICK	YES
FLOATING ON UNDERLAY	YES
OVER UNDERFLOOR HEATING	YES

WARRANTY

RESIDENTIAL	LIFETIME STRUCTURAL
COMMERCIAL	10 YEARS STRUCTURAL

AUSTRALIAN STANDARDS

ACOUSTIC RATING	DEPENDENT ON UNDERLAY
SLIP RATING AS 4586-2013	P2
FORMELDELHYDE RATING	E1
CRITICAL HEAT FLUX (CHF) MEAN AS/ISO 9239.1-2003	4.6 kW/m ²
JANKA HARDNESS RATING	1120

